

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: OEM Parts Manufacturing

Segment: 23 – Manufacturing – Electrical Equipment and Computers

Soil: Shop dirt, oil, cutting fluids

Substrate: Aluminum, steel

Description of Part(s): Plates with screws

Customer objective: The customer was looking to improve their cleaning performance and automate their cleaning process.

Cleaner used: 5% by volume ArmaKleen™ 4 in 1 Cleaner

Machine used: Spray Washer (JRI TL3, JRI FL250, JRI FL500, Better Engineering G-2000)


Temperature used: 160°F

Time required: 15 minutes to 1 hour

Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 5% by volume ArmaKleen™ 4 in 1 Cleaner at 160°F in a Spray Washer for a minimum of 15 minutes to 1 hour.

Before Picture

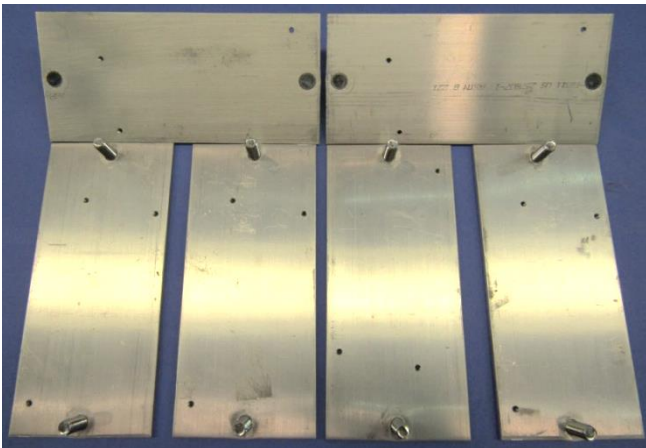

After Picture

